


## Instructions for removing closet rod and moving a fixed shelf.



**STEP 1.** Remove closet rod by lifting from under the rod on one side. Remove rod cups. Use flat head screw driver or putty knife to pry behind the cup if needed.

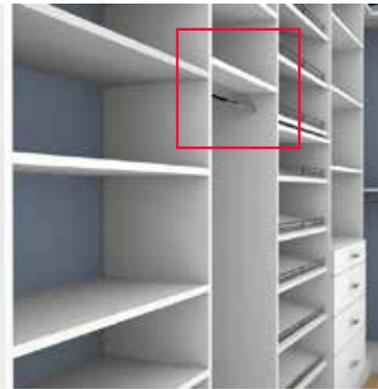

**STEP 2.** Locate the locking cams beneath the fixed shelf. There are four cams on each shelf. See above picture: when the flat edge of the phillips screw is facing away from the panel, the cam is locked.



**STEP 3.** Use phillips screw driver no. 2 to unlock each fixed cam by inserting the screw driver and turning it 180 degrees or so the flat edge of each screw is facing the panel.



**STEP 4.** Once all cams are unlocked, carefully tap one side then the next to release the shelf from the dowels in the panels. Lift the shelf out and set aside.


**STEP 5.** Remove the dowel studs by inserting your phillips screwdriver into the end of the dowel. Press towards the panel and give a few rotations in the counterclockwise direction to loosen the dowel. Next unthread the dowel by hand and reuse. Place dowels at any height along the panel and work in opposite order to the replace shelf and rod location.

## Instructions for reinstalling closet rods.

### OVAL & SIGNATURE RODS:

Closet rods are very easy to move, especially if your closet features full-bore drilling. Rods are movable along the drilling pattern in your closet panels and can be placed at any height. For hanging sections we suggest that you leave one hole between the rod cup and the underside of the shelf above the rod.

Place a rod cup in the predrilled holes of your closet panel and simply drop the rod into place in it's new position.

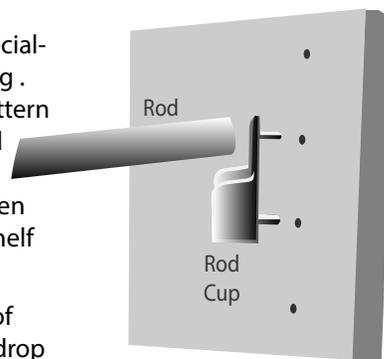

### ROUND RODS:

If you selected round rods, they install using the 2-piece round rod cups provided. To use these cups, first mount the bases into the system holes at the desired height. Then place the cups over the ends of the closet pole/rod. Drop the pole with cups onto the mounting base.

